



Stock Sliding Shoji Screens - MEASURING & ORDERING GUIDE:

CherryTreeDesign

How to Order:

1. Determine if you will use **INSIDE MOUNT** or **OUTSIDE MOUNT** for your treatment.
 - **INSIDE MOUNT:** Inside mounted screens are contained within your opening framework. Hardware is mounted to the top of the opening. Many people prefer an inside mount because it provides a finished, built-in look. (See Diagram A.)
 - Use the opening depth table (below) to determine if your opening has enough unobstructed depth.
 - If your frame depth won't accommodate the hardware you've selected, choose an outside mount.
 - For an inside mount, your frame depth needs to be the same or greater than the minimum depth required on the opening depth table. (Except when installing into a closet.)

Chart A – Inside Mount

Product #	SSS-3080		SSS-3680	
	Max Width	Required Height	Max Width	Required Height
1 Screen *	30"	83"	36"	83"
1 Screen – w/ Recessed Track*	30"	79-1/2"	36"	79-1/2"
2 Screens	58" †	83"	70" †	83"
3 Screens	86" †	83"	104" †	83"
4 Screens	116" ††	83"	140" ††	83"
4 Screens – Quad Track	114" †	83"	138" †	83"

*Refers to Pocket Door.

† This width includes 2" overlap between the screens. Use smaller overlap & 3" Extension as needed.

†† This width includes two 2" overlaps between the screens. Use smaller overlap & 3" Extension as needed.

- **OUTSIDE MOUNT:** Outside mounted screens are mounted on your wall or casing. They are often used to move the shoji over a wall to fully clear an opening or to hide a less than attractive window. Please note: Hardware is mounted over the opening; therefore you must have at least 4-5/8" of clearance above the opening to allow space for mounting the tracking and valance. (See Diagram B.)
 - Measure the area you want to cover, including any overlap on the surrounding wall. We recommend at least 1/2" on each side of the opening.
 - Use the opening depth table (next page) to determine if the area above your opening has enough unobstructed depth to accommodate your treatment.


Chart B – Outside Mount

Product #	SSS-3080		SSS-3680	
	Max Width	Max Height	Max Width	Max Height
1 Screen	<30"	80"	<36"	80"
2 Screens	<58" †	80"	<70" †	80"
3 Screens	<86" †	80"	<104" †	80"
4 Screens	<116" ††	80"	<140" ††	80"
4 Screens – Quad Track	<114" †	80"	<138" †	80"

† This width includes 2" overlap between the screens. Use smaller overlap & 3" Extension as needed.

†† This width includes two 2" overlaps between the screens. Use smaller overlap & 3" Extension as needed.

Tracking Examples:

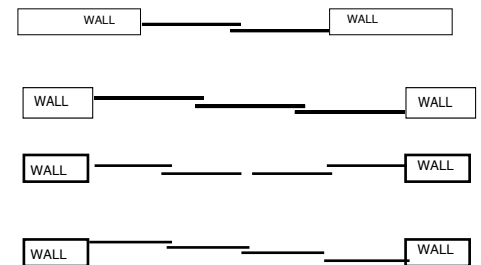

Tracking Examples:

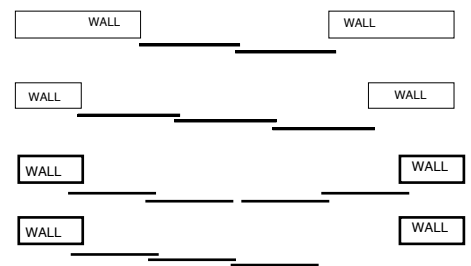


Chart C: Opening Depth Table: Unobstructed Depth required for Inside and Outside Mount:

# of Tracks	Inside Mount – See Diagram A	Outside Mount – See Diagram B
Single (1)	2-3/8" *	3-1/8" **
Double (2)	3-3/4" *	4-1/2" **
Triple (3)	5-1/8" *	5-7/8" **
Quad (4)	6-1/2" *	7-1/4" **
NOTE:	* Includes primary valance. Add 1/2" for secondary valance	** Includes primary valance. Accommodates 3/4" casing depth.

Diagram A:

Inside Mount:


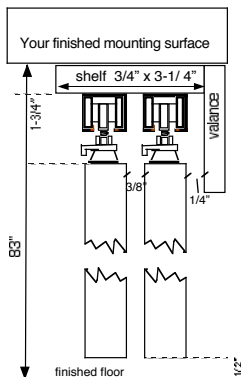


Diagram B:

Outside Mount:

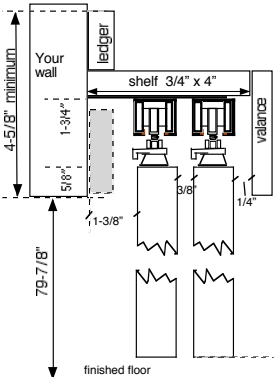

2. **Screens versus Packages:** Determine **1)** if you want to order the screen only (provide your own tracking, hardware and valances) **or 2)** if you want to purchase our screen packages, which include all tracking, hardware and valances.
 - A**
3. **Door Size & Quantity:**
 - Determine what screen size and quantity that will work for your treatment and opening size. See chart A & B. The maximum width of the opening includes a 2" full stile overlap between the doors. A 1" partial overlap can be used to cover more area.
4. **Order your Tracking and Valances:**
 - A** • We provide standard packages based on your treatment and opening size. See the "Stock Shoji Screens & Packages Price List" for options and pricing.
 - B** • Determine if the tracking will extend the width of the opening only or if they will span across the opening plus one or two panel widths. If your application requires the tracking beyond the opening, order the corresponding track extensions.
5. **Choose Optional Features and Upgrades:**
 - **Standard Facings:** Select your choice of durable, puncture-resistant laminated papers.
 - Ocean Mist Laminate (OML – White Rice Paper), Mulberry Laminate (MBL – Beige with Brown Speck), Crystal White Fiberglass (FG – White), or Butter Vellum (BV – Cream).
 - **Optional Facings:** See Price List for up-charges.
 - D** ○ **Upgrade Laminates.** Additional color choices with same durability as standard facings. Choices include Amber Rays Laminate (ARL), Marble Laminate (ML) Tawny Laminate (TL) and Etched Ivory Laminate (EIL).
 - E** ○ **Upgrade Washable .2mm Encapsulated Facings:** Flexible, Lightweight and Washable Material. Sea Foam (SFE), Sandstone (SAE), Speckled Sand (SSE).
 - E** ○ **Upgrade Washable 1mm Encapsulated Facings:** Rigid, Durable and Washable Material. Downy White (DWE), Ice Crystal (ICE), Jet Stream (JSE).
 - G** • **3" Hardwood Extension (3-EXT):** Used to accommodate outside mount openings that are larger than specified in our "Measuring & Ordering Guide". Recommend one per opening.
 - H** • **Edge pulls (EP1):** Pocket Doors hardware. Finish choice of Bronze (BZ), Brass (BR) or Nickel(N).
 - F** • **Custom Black Lacquer finish (BLK):** Allow 2-3 week lead-time.

Please note: If our stock doors do not work for your treatment, **call us at 800-634-3268 or email, doors@cherrytreedesign.com**, and ask about our custom shoji screen program.